

## RDA CR300 CE Rotators 300 tonne set capacity

Red-D-Arc's RDA CR300 CE rotators feature all-fabricated-steel base construction with wheel carriages that can be manually positioned to accommodate vessels of varying diameters around a constant centre-line. Vessel rotation is via a two-motor, two-wheel-drive system which eliminates the need for torque bars. Drive motors are inverter-controlled variable-frequency AC-type with fan cooling and are fully enclosed for trouble-free operation. Double reduction worm and wheel gearboxes are used for enhanced durability and extended overhaul intervals. Drive and idler wheel shafts are housed in deep-groove-type roller bearings and gearboxes are of aluminum/bronze construction. Both the drive roll and idler roll have forklift slots built into the frames for easy maneuverability. Control boxes have IP65-rated enclosures and utilize variable-frequency AC-control electrical systems with full UL and CE certification. In addition, all our conventional turning rolls have been tested and certified by UL to establish safe working loads - a first in the weld automation industry.



#### **Specifications**

Model RDA CR300 CE rotator set (drive and idler)

Load Carrying Capacity, Drive
Load Carrying Capacity, Idler
Load Carrying Capacity, Set
Rotation Capacity, Drive Roll
Wheel Centre Distance
Vessel Diameter Capacity
Rotation Speed Range
150 tonnes maximum
300 tonnes maximum
1090, 1890, 2690, 3490 mm
800 mm to 7500 mm
100 to 1000 mm/min

Tyre Type Polyurethane, A95 durometer rating Wheel Size 864 mm diameter x 406 mm wide

Five Function Control Push Button Pendant, 20 m cable (forward/stop/reverse/speed control/emergency stop)

Rotation Drive Motors 2 x 5.5 kW with fan cooling
Primary Input Power 380 to 480 V, 3 phase, 50/60 Hz


Input Current at Rated Load 29.9 A
Weight, Drive 6250 kg
Weight, Idler 4500 kg
Control Box Ingress Protection Rating IP65
Control Box Electrical Certification UL508
Loading Capacity Certification UL2011


Red-D-Arc Welderentals rents and sells welding and weld-positioning equipment - around the world.




# RDA CR300 CE Rotators 300 tonne set capacity


### Drive

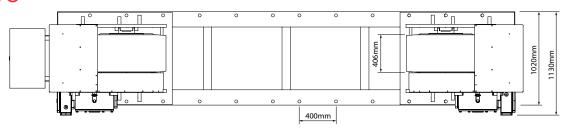

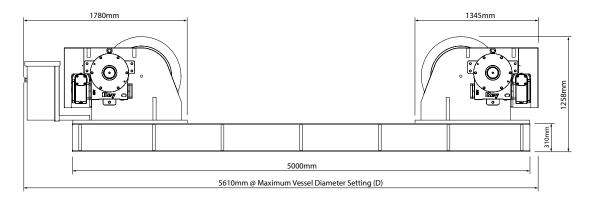

### Idler

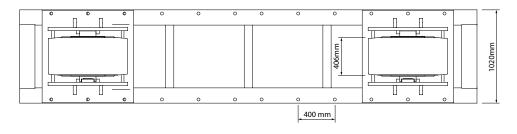

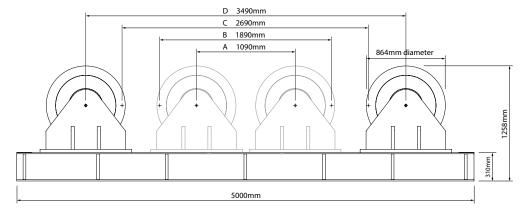

#### Vessel Diameter Ranges

Setting	Minimum	Maximum	Setting	Minimum	Maximum
Α	800mm	1900mm	C	3300mm	5500mm
В	1900mm	3600mm	D	4600mm	7500mm